




INSTALLATION INSTRUCTIONS



Apply to the below style of LED Backlit Mirrors



Please read carefully and save these instructions.

Don't discard any of the packaging until you are sure that you have all of the parts and the fittings.

Make sure power to the junction box is off before commencing installation.

IMPORTANT

- Unpack mirror. DO NOT lay mirror on tiled or concrete surface prior to installation. Mirror must be on protected surface to prevent chipping of the corners.
- Care must be taken before drilling pilot holes to avoid any existing wiring or pipe work that may be concealed.
- A certified electrician must perform all work. The mirror must be connected to a GFI.
- The anti-fog mat operates only when the LED light is turn on by the touch sensor.

INSTALLATION

Please refer the installation diagram on the back of the page.

- 1) Unpack the LED mirror and prepare tools needed.(See Pic.1)
- 2) Make sure the measurement on the aluminum hanger screw holes are matching up with aluminum base on the mirror back, then mark the screw holes with pencil.(See Pic.2)
- 3) Drill holes, and put in the plastic plugs, then fix the aluminum bar by screws and twisting the T shape nail to the wall.(See Pic.3&Pic.4);
- 4) (Make sure the power off)Connect the cable before hanging the LED mirror to the wall. The way for connecting wires: Black wire to Live Terminal (L), White wire to Neutral Terminal (N), Green wire to Earth Terminal (E) (120V, 60Hz)(See Pic. 5)
- 5) Hanging the LED mirror with aluminum bar and lock it with the anti-pull iron sheet by using the spanner provided at the fittings bag.(See Pic.5&Pic.6)
- 6) Turn the light and anti-fog function by the touch sensor switch, see details as below:
 - Button 1: power control for LED Light and Defogger;
 - Button 2: Color Temperature control, 3000K~6000K adjusting. Press the button (tip on it), it will change from one level to another level(warm yellow 3000k-warm white 4000k- cold white 6000k); Long press, it will change gradually (3000k~6000k);
 - Button 3: Brightness adjusting; Press the button (tip on it), LED Light Brightness will change from one level to another level(5%,30%,60%,100%); Long press the button, the brightness will change gradually(5%~100%);
- 7) Digital clock adjust button at the mirror back, long press into the settings mode, about 3 second the hour position flash, then short press to adjust hour. After 3 second, the minute position flash, then short press to adjust minute.(See Pic.7)


MAINTENANCE

Wipe clean with a soft damp cloth. Apply glass cleaner to cloth and do not apply directly to mirror.


Never use abrasive cleaners as these could damage the finish or exposed LED strips.

INSTALLATION DIAGRAM


1

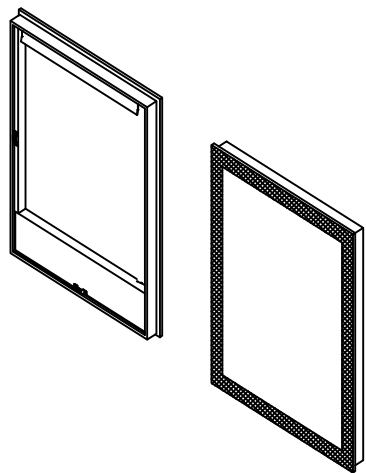


Tools Needed:



2

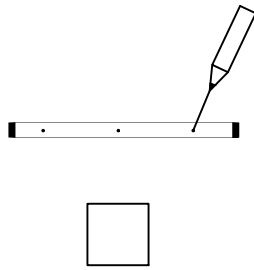


3

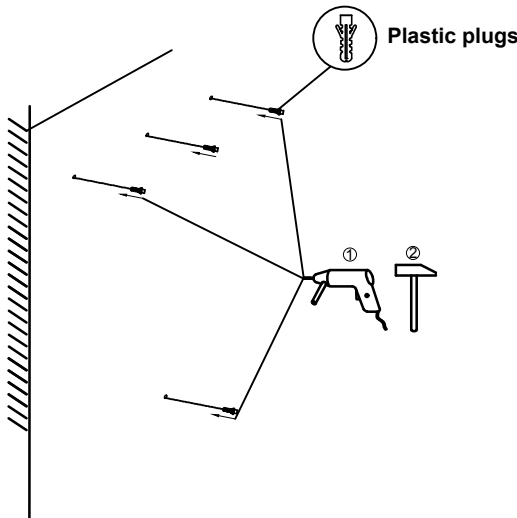


Plastic plugs

4

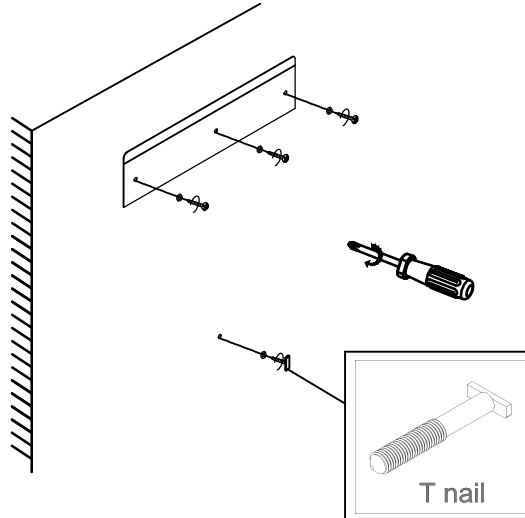

T nail


5

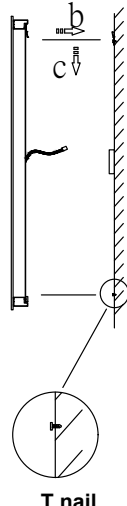


T nail

WIRING DETAILS


INCOMING SUPPLY		MIRROR WIRING	
SWITCHED LIVE	L	— BLACK or LABELED - L	
EARTH (GREEN/YELLOW SLEEVED COPPER)	⊕	— GREEN - E	
NEUTRAL	N	— WHITE or LABELED - N	

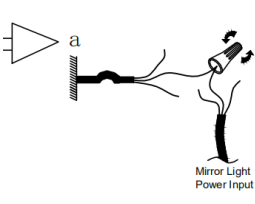

Mirror Light Power Input




6

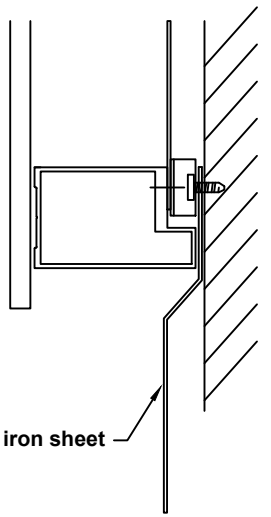

Anti-pull iron sheet


7

Digital clock adjust:
 1. Long press into the setting mode
 2. Short press adjust the hour or minute position

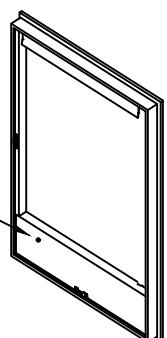

Adjustable button

8

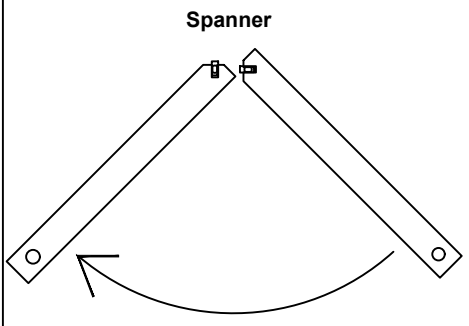

Spanner